

FPS1000 SERIES

AC / DC Single Output: 1000 ~ 3000 Watts



Specifications

Input Voltage	85 ~ 265VAC (120 – 380VDC)
Input Frequency	47 ~ 63Hz
Input Current	12A / 6A (110 / 230VAC)
Leakage Current	1.1mA @ 230VAC
Inrush Current	40A maximum
Power Factor	Typically 0.98 at full load
Harmonics	EN61000-3-2
Output Voltage	12V, 24V, 32V & 48V nominal
Output Power	Typically 1000W at 230VAC
Efficiency	Typically 86% (Model dependent)
Hold up time	20ms at nominal input 110 / 230VAC
Line Regulation	± 0.4%
Load Regulation	± 0.80%
Output Ripple & Noise	150mV for 12V output 250mV for 24/32V outputs 300mV for 48V output
Temperature Coefficient	< 0.02% per °C
Remote Sensing	Yes (refer to manual for complete details)
Parallel Operation	Yes. Single wire current share, 10% accuracy of rated output, up to 8 units max, refer to manual
Series Operation	Yes, refer to manual
Over current Protection	105 ~ 120% of rated output
Over voltage Protection	Yes. Inverter shut down method. Reset by recycle AC voltage, or by On/Off control.
Over temp. Protection	Inverter shut down, automatic restart.
Remote ON/OFF	By electrical signal or dry contact. Refer to instruction manual.
DC OK Signal	Open Collector max sink current 10mA
Over Temp Signal	Open collector signal.
AC Fail Signal	Open collector signal.
Auxiliary output	12V, 0.25A output
Vout Programming	By external voltage or Resistor, refer to manual for details.

Features

- Universal input 85 - 265VAC
- 1000W 1U Hot Swap Rectifier Modules
- Up to 3000W power in 1U x 19in Rack (with 3 modules)
- Isolation diodes for **N+1 Redundancy**
- Current share between modules, (up to 8 (FPS1000 modules)
- Status monitoring signals
- Harmonic correction EN61000-3-2 ,Power Factor 0.98
- EMC EN55022-B, Immunity to EN61000-4
- International safety approvals EN60950, UL60950
- Suitable for use in Battery Charging applications
- I² C Interface option

Instruction manual and further details available from our website.
FPS power supplies are only designed to operate in controlled environments.

Description

The **FPS1000 series** power supply is a established, field proven, “High Power Density” design, aimed at key projects, where performance and reliability is paramount.

One 19in x 1U rack, can hold up to three 1000W rectifier modules, with up to eight modules in parallel to provide up to 8kw of power with N+1 Redundancy.

There are a number of programming and status signals, allowing end users to configure a system that suits their application.

Specifications Cont:

Front Panel LED	AC OK, DC OK , DC FAIL
I²c Interface	Optional, refer to Instruction Manual.
Operating Temp.	0°C to +70°C. Refer to manual for derating
Operating Humidity	10~90% RH, no condensation.
Cooling	By internal Fans. Variable speed control based on ambient temperature and power level.
Shock & Vibration	Built to meet IEC60068-2-64 (Basic Transportation)
Conducted Emission	Built to meet EN55022 Class B, FCC part 15 Class-B, VCCI Class-B
Radiated Emission	Built to meet EN55022 Class A, FCC part 15 Class-A, VCCI Class-A
Immunity	Built to meet IEC61000-4-2 (Level 2,3), -3 (Level 2), -4 (Level 2), -5 (Level 3,4), -6 (Level 2), -8 (Level 4), -11
Safety	UL60950-1 Second Edition, EN60950-1 Second Edition
Isolation	Input – Output: 3000VAC,
Dimensions (Modules)	127 x 41 x 290mm Refer to outline drawing. (2Kg)
Rack	1U x 19in , refer to outline drawing

FPS1000 SERIES

AC / DC Single Output: 1000 ~ 3000 Watts

Model Power Supply	Output		V Range	Power
	V	A		
FPS1000-12	12V	72A	10.5 ~13.2V	864W
FPS1000-24	24V	40A	21.5 ~ 29.0V	960W
FPS1000-32	32V	31A	28.8 ~ 38.4V	992W
FPS1000-48	48V	21A	43.0 ~ 58.0V	1008W
FPS1000-12P	12V	72A	10.5 ~13.2V	864W
FPS1000-24P	24V	40A	21.5 ~ 29.0V	960W
FPS1000-32P	32V	31A	28.8 ~ 38.4V	992W
FPS1000-48P	48V	21A	43.0 ~ 58.0V	1008W

1. Standard units, input is via IEC socket on the rear of 1U Rack.
2. -P models have input via IEC socket on front of FPS1000 modules (Option)
3. Add "S", for optional I²C Interface

Rack Selector	Rack Details
FPS-S1U (Standard Rack)	1U x 19in Rack Assembly. Suitable for 1-3 FPS1000-xx rectifier modules, with input via three separate IEC sockets on rear of rack.
FPS-S1U- P	1U x 19in Rack Assembly. Suitable for 1-3 FPS1000-xxP rectifier modules, with input via individual front panel IEC sockets on each module.

Rack Option	Part no: FPS-T1U
1U x 19in rack with three outputs "floating" from each other, allowing a combination of different voltages FPS1000 modules to be loaded into the rack	

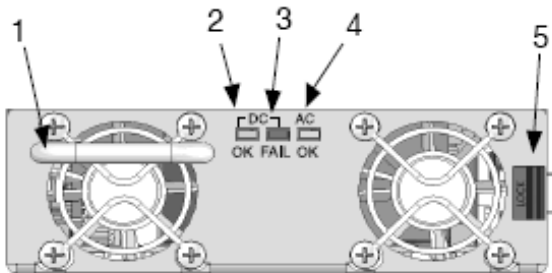


Fig. 3-1: FPS1000 front panel

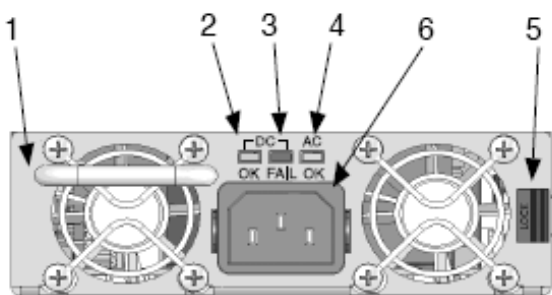


Fig. 3-2: FPS1000/P front panel

FPS1000 Front Panel Details.

1. Handle
2. DC OK green LED, ON when output is on.
3. DC Fail red LED, ON when output has failed
4. AC OK green LED, ON when input voltage is on
5. Lock / Unlock level. Automatically locks the power supply module to the FPS -S1U rack.
 - Push the lock / unlock lever towards the power supply cooling fan to withdraw the FPS1000 power supply from the rack
6. IEC320 AC inlet for FPS1000-xx-P models


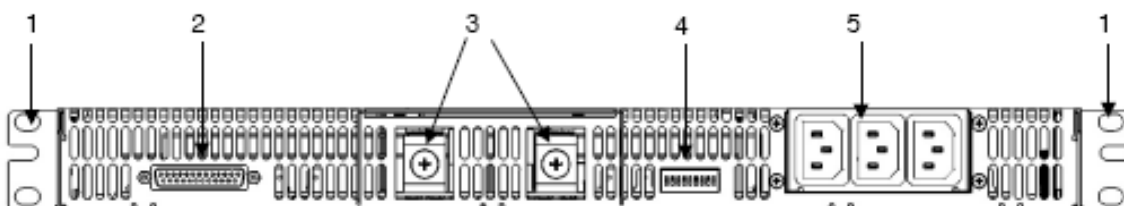


Fig 10.1: FPS-S1U Rear Panel


1. Mounting brackets. Use M6 x 12 screws to fix the FPS -S1U to the rack
2. DB25 connector for control and monitoring signals
3. Output voltage terminals. Use M6 x 16 screws and lug to connect load wires.
4. DIP switch for I²C option address settings. Refer to manual for details
5. IEC320 AC Inlets shown on FPS-S1U rack. One for each FPS1000-xx rectifier
6. Optional terminal block connector available, rack part no: FPS-S1U/TB

CHAPTER 11 FPS-S1U AND FPS-S1U/P OUTLINE DRAWINGS

11.1 FPS-S1U Outline Drawing

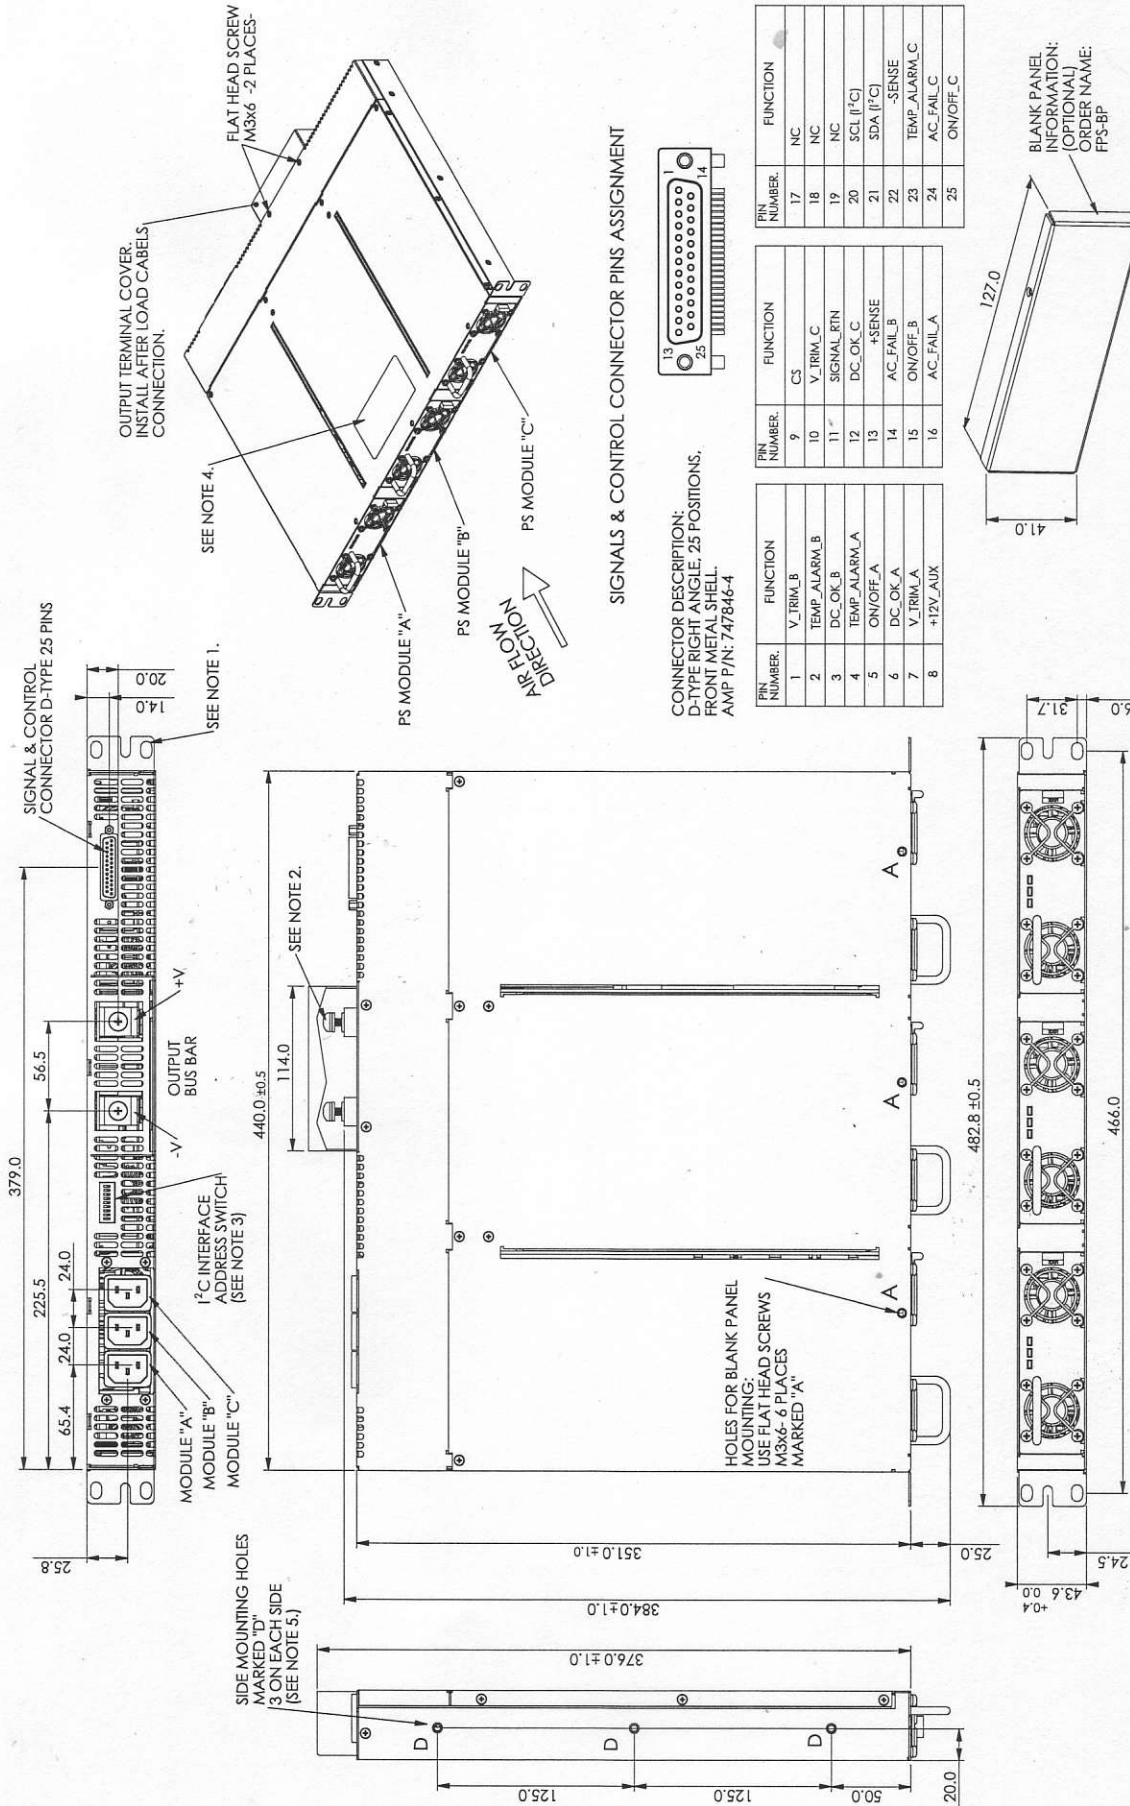

SIGNALS & CONTROL CONNECTOR PINS ASSIGNMENT



CONNECTOR DESCRIPTION:
 D-TYPE RIGHT ANGLE, 25 POSITIONS,
 FRONT METAL SHELL,
 AMP P/N: 747846-4

PIN NUMBER	FUNCTION	PIN NUMBER	FUNCTION	PIN NUMBER	FUNCTION
1	V. TRIM. B	9	CS	17	NC
2	TEMP. ALARM. B	10	V. TRIM. C	18	NC
3	DC. OK. B	11	SIGNAL. RTN	19	NC
4	TEMP. ALARM. A	12	DC. OK. C	20	SCL (I°C)
5	ON/OFF. A	13	+SENSE	21	SDA (I°C)
6	DC. OK. A	14	AC. FAIL. B	22	-SENSE
7	V. TRIM. A	15	ON/OFF. B	23	TEMP. ALARM. C
8	+12V. AUX	16	AC. FAIL. A	24	AC. FAIL. C
				25	ON/OFF. C



BLANK PANEL INFORMATION:
 (OPTIONAL)
 ORDER NAME:
 FPS-BP

- NOTES
1. MOUNTING HOLES FOR 19" RACK. USE M6x12 TO FIX THE UNIT TO A RACK.
 2. M6x16 SCREWS FOR LOAD WIRES FIXING. USE M6 LUG FOR THE LOAD WIRES. RECOMMENDED TIGHTENING TORQUE 42-56 kgf.cm
 3. REFER TO INSTRUCTION MANUAL FOR SETTING DETAILS.
 4. MODEL NAME, VOLTAGE AND CURRENT RATING AND SAFETY APPROVALS SYMBOLS WILL BE SHOWN HERE ACCORDING TO THE SPECIFICATIONS.
 5. MOUNTING HOLES M5 FOR MOUNTING BRACKETS. USE M5x8 SCREWS TO FIX THE BRACKETS TO THE CHASSIS. SCREWS MUST NOT PENETRATE THE CHASSIS MORE THAN 6 mm.
 6. THE FPS-S1U RACK IS SHOWN WITH 3 FPS1000 UNITS INSTALLED.