


SiteStar™ Tall EQ4

Multiply battery life - Save energy



Designed to withstand the forces of nature - compliant with **seismic zone 4** earthquake standards.

- Built to survive major earthquakes and extreme temperatures
- Multiply the lifespan of your batteries
- Up to 95% power saving compared to traditional airconditioned battery cabinets
- Low power consumption reduces CO₂ emissions
- Eco Mode to optimize energy consumption
- Battery capacity up to 4 strings of 48V 180 Ah
- Compliant with GR-63-CORE
- Dual skin construction with foam insulation – outer liner made of powder coated stainless steel
- Non destruct -40°C to +60°C (-40°F to +140°F)
- Ingress protection class IP55
- Summary or individual alarm output
- Operating temperature range: -40°C to +50°C* (-40°F to +122°F*)

* If temperature of operating environment is consistently high please consult NorthStar

SiteStar™ Tall EQ4

Technical Specifications




Mechanical

Size (W x D x H)	660 x 780 x 1800 mm (26 x 31 x 71 in)
Weight cabinet complete	200 kg (441 lbs)
Internal load handling	1200 kg (2645 lbs)
Encapsulation	IP55 Class
Color	NCS-S-1000-N
Battery capacity	Max battery capacity 16 x 180 Ah 48 V – can be configured as 24 or 48 V

Electrical

DC connection	42-56 VDC
Power consumption (Average at 35°C/ 95°F ambient temperature in ECO Mode)	50 W
Power consumption max at cooling	160 W
Power consumption max at heating	300 W
Alarm connection	Individual; CLU, internal and door; D-sub 9, NC
Acoustical noise	Typical 4.8 Bel(A) Maximum 4.8 Bel(A)

Drawings

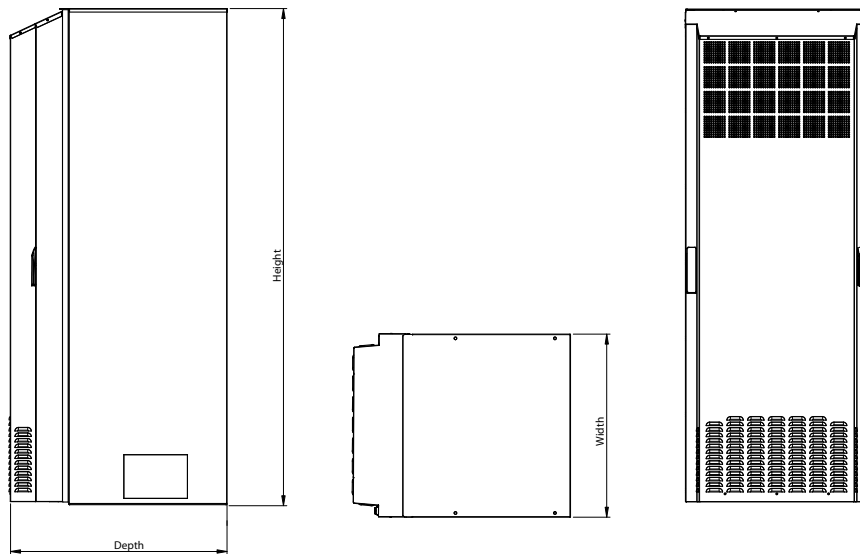

SiteStar™ cabinets are UL-Listed, CE Marked and internationally certified.

