

# FEC40W SERIES

DC / DC Single & Dual Output: 40 Watts



## Features

- 4:1 wide Input range option 9~36V & 18~75V
- Single & Dual outputs
- Industry Standard 2 x 2 in package
- High efficiency up to 82%
- Regulated output & Short circuit protection
- 1600V isolation
- Five sided continuous copper shield
- Remote ON / OFF- Standard Positive Logic
- Remote ON / OFF- Negative Logic - Option
- High operating temperature +85°C
- Fixed switching frequency
- Optional heat sink: P/N : 7G-0026A.

## Specifications:

<b>Input Voltage</b>	24VDC ( 9 ~ 36 ) 48VDC ( 18 ~ 75 )
<b>Input Filter</b>	Pi type
<b>Input Surge Voltage.</b> ( 100mS )	24V: 50VDC. 48V: 100VDC
<b>Input Reflected Ripple Current</b>	20mA pk-pk @ nominal input & 100% load
<b>Start Up time</b>	10mS constant resistive load
<b>Remote ON/OFF</b> ( Positive logic – Standard )  ( Negative logic – Option )	DC-DC ON    Open or 3.0V < Vr < 12V DC-DC OFF    Short or 0V < Vr < 1.2V  DC-DC ON    Short or 0V < Vr < 1.2V DC-DC OFF    Open or 3.0V < Vr < 12V Input current of remote control pin: .5mA Remote off state input current: 10mA for 24Vin 5mA for 48Vin
<b>Output power</b>	40 watts
<b>Voltage Accuracy</b>	±1.0%
<b>Minimum Load</b>	See table
<b>Output Voltage Trim</b>	±10% ( single & Dual output )
<b>Line Regulation</b>	Single ±0.2% Dual ±0.2%
<b>Load Regulation</b>	Single ±0.5% , Dual ±1% ( Min load -100% load )
<b>Cross Regulation</b>	±5% Asymmetrical load: 25-100% load )
<b>Ripple &amp; noise</b>	See table. 20MHZ bandwidth
<b>Temp. Coefficient</b>	±0.02% / °C
<b>Transient Response</b>	250uS ( 25% load step change )
<b>Over Voltage Protection</b>	1.5V ~ 3.3V: 3.9V: 5.0V: 6.2V 12V: 15V 15V: 18V

<b>Overload Protection</b>	Typically 150% of load
<b>Short Circuit protection</b>	Continuous hiccup mode
<b>Efficiency</b>	Model dependant 86 ~ 87%
<b>Isolation</b>	1600VDC
<b>Isolation Cap.</b>	25000pF
<b>Switching Freq.</b>	300KHz
<b>Safety</b>	EN60950-1, UL60950-1
<b>Case Material</b>	Nickel-coated copper
<b>Base Material</b>	Non-conductive black plastic
<b>Potting</b>	Epoxy UL94-V0
<b>Dimensions</b>	50.8 x 50.8 x 10.2mm
<b>Weight</b>	60g
<b>MTBF</b>	1.511 x 10 <sup>6</sup> Hrs
<b>Operating Temp</b>	-40°C to +50°C ( without derating ) -40°C to +105°C ( with derating )
<b>Case Temp</b>	+100°C maximum case temperature
<b>Thermal Impedance</b>	9.2°C / watt Standard convection 7.6°C / watt with optional heatsink
<b>Thermal shock</b>	MIL-STD-810F
<b>Vibration</b>	10-55Hz, 10G, 30min along X, Y,Z
<b>Humidity</b>	5-95% RH
<b>EMC</b>	EN55022 Class A Consult office for Class B design
<b>ESD</b>	EN61000-4-2
<b>Radiated Immunity</b>	EN61000-4-3
<b>Fast Transients</b>	EN61000-4-4
<b>Surge</b>	EN61000-4-5
<b>Conducted Immunity</b>	EN61000-4-6





# FEC40W SERIES

DC / DC Single & Dual Output: 40 Watts

Model	Input V	Output V	Output Current		Output Ripple & Noise	Input Current		Eff (%)	Capacitor Load max
			Min. load	Full load		No load	Full load		
FEC40-24S3P3W	9 – 36 V	3.3 V	0mA	10000mA	50mVp-p	80mA	1677mA	86	25750uF
FEC40-24S05W	9 – 36 V	5 V	0mA	8000mA	50mVp-p	100mA	2008mA	87	13600uF
FEC40-24S12W	9 – 36 V	12 V	50mA	3333mA	75mVp-p	50mA	2008mA	87	2360uF
FEC40-24S15W	9 – 36 V	15 V	50mA	2666mA	75mVp-p	50mA	2008mA	87	1510uF
FEC40-24D12W	9 – 36 V	± 12 V	±65 mA	± 1667mA	120mVp-p	60mA	2032mA	86	± 1200uF
FEC40-24D15W	9 – 36 V	± 15 V	±50 mA	± 1333mA	150mVp-p	60mA	2032mA	86	± 750uF
FEC40-48S3P3W	18 – 75 V	3.3 V	0mA	10000mA	50mVp-p	50mA	838mA	86	25750uF
FEC40-48S05W	18 – 75 V	5 V	0mA	8000mA	50mVp-p	60mA	992mA	88	13600uF
FEC40-48S12W	18 – 75 V	12 V	50mA	3333mA	75mVp-p	30mA	1004mA	87	2360uF
FEC40-48S15W	18 – 75 V	15 V	50mA	2666mA	75mVp-p	30mA	1004mA	87	1510uF
FEC40-48D12W	18 – 75 V	± 12 V	±65 mA	± 1667mA	120mVp-p	30mA	1016mA	86	± 1200uF
FEC40-48D15W	18 – 75 V	± 15 V	±60 mA	± 1333mA	150mVp-p	30mA	1016mA	86	± 750uF


**Note**

1. MTBF as per BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment)  
MIL-STD-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
2. Typical values at nominal input voltage and full resistive load.
3. The output requires minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
4. For the single output: Maximum output deviation is 10% inclusive of remote sense and trim. If remote sense is not being used, the +sense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding –OUTPUT.
5. Load regulation for dual output : Min load to 100% load balanced on all outputs.
6. Cross regulation for dual output : asymmetrical load 25% / 100% FL
7. The ON/OFF pin voltage is referenced to –Vin To order negative logic ON/OFF control add the suffix-**N** (eg: FEC40-24S05W-N).
8. Heat sink is optional and **P/N : 7G-0026A**.
9. The FEC40W series can meet EN55022 Class A with parallel an external capacitor to the input pins.  
Recommend : 24Vin : N/A 48Vin :2.2uF/100V\*2 PCS 1812 MLCC.
10. An external filter capacitor is required if the module has to meet EN61000-4-5.  
Filter capacitor recommended: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.

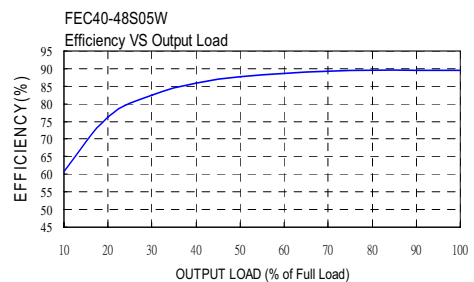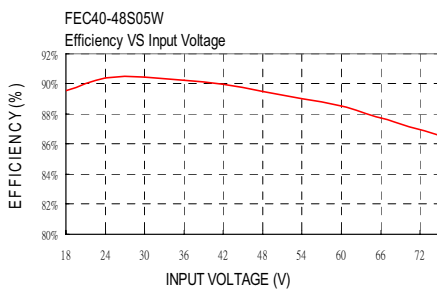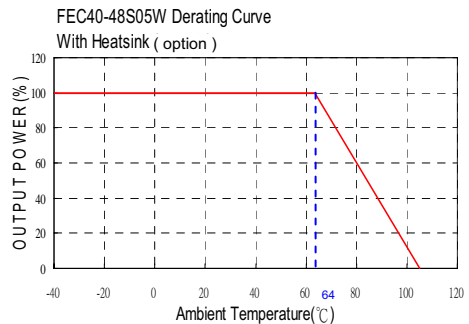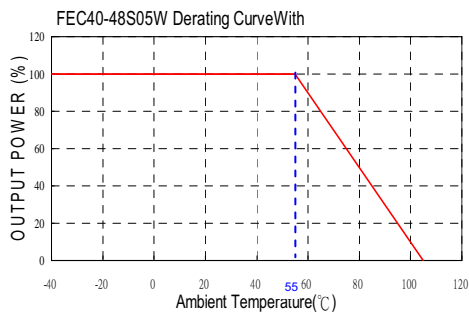


# FEC40W SERIES

DC / DC Single & Dual Output: 40 Watts

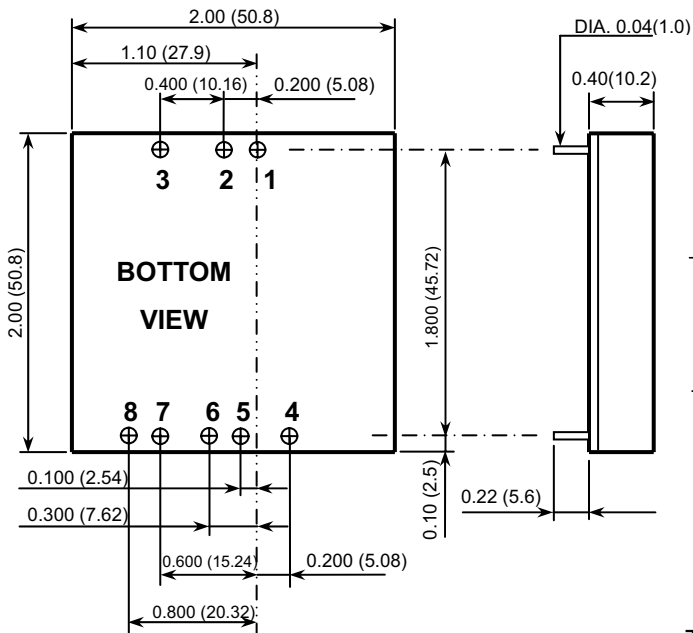

- All dimensions in Inches (mm)  
Tolerance: X.XX±0.02 (X.X±0.5)  
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)

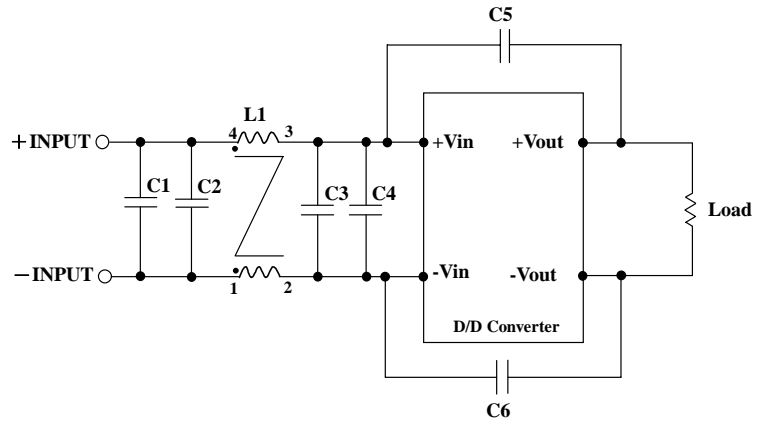

### Recommended Filter for EN55022 Class B Compliance



The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	C5 & C6	L1
FEC40-24xxxW	4.7uF/50V 1812 MLCC	N/A	4.7uF/50V 1812 MLCC	N/A	1000pF/2KV MLCC	450uH Common Choke PMT-048
FEC40-48xxxW	2.2uF/100V 1812 MLCC	2.2uF/100V 1812 MLCC	2.2uF/100V 1812 MLCC	2.2uF/100V 1812 MLCC	1000pF/2KV MLCC	830uH Common Choke PMT-053

Pin Assignment		
PIN	SINGLE	DUAL
1	+INPUT	+INPUT
2	-INPUT	-INPUT
3	CTRL	CTRL
4	-SENSE	+OUTPUT
5	+SENSE	COM
6	+OUTPUT	COM
7	-OUTPUT	-OUTPUT
8	TRIM	TRIM

### EXTERNAL OUTPUT TRIM

Output can be externally trimmed by using the method shown below.  
( ) for dual output trim

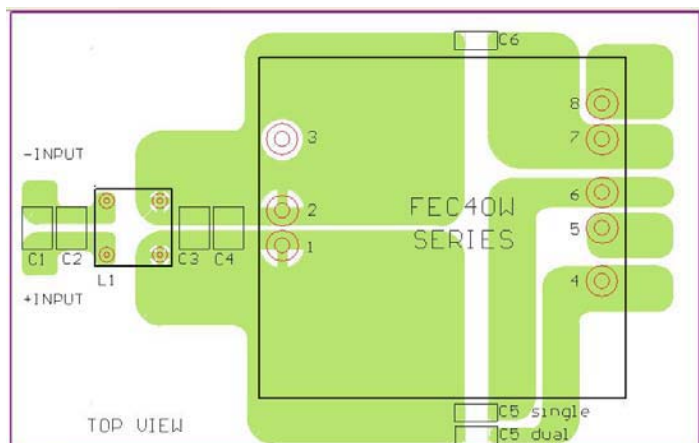

Recommended EN55022 Class B Filter Circuit Layout