


SDA 10-4820 Lithium iron phosphate (LFP) battery

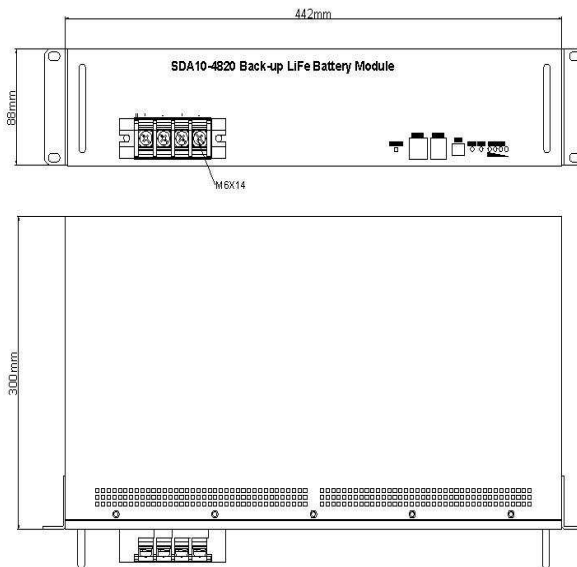

Brief Introduction:

LFP battery system is a high-tech product, it's manufactured and developed successfully by Innovative Energies, The product is mainly used in backup power of telecommunication field. It can support used in parallel.

Attain certificate:

ISO9001(03012Q10124R3M),ISO14001(03011E108R2M),GB/T28001(03012S10050R0M),CE, UL,ROHS,TUV.

Production features:

- 1、 Battery's positive pole using LiFePO₄ material with high cycling life and good security feature ;
- 2、 The battery system using high performance battery management system(BMS), the BMS have current, voltage, temperature protect function ;
- 3、 Automatic Management of charging and discharging , supervision unit automatically measure the batteries' charging and discharging current, and management the batteries' float charge and boost charge ;
- 4、 Small in volume and light in weight, reduce about 50% (compared with LA Battery) ;
- 5、 The battery system has a good electromagnetic compatibility ;
- 6、 It also can communication with the remote central control center ;
- 7、 Configuration flexible : multi modules can be parallel connected to last long the back up time;
- 8、 Excellent high temperature performance, and air condition is unnecessary when the ambient temperature is less than +40 °C , which can save energy.

Basic parameter:

model	Rated voltage (v)	Rated capacity(Ah)	Body size (do not include the handle) (mm)	weight(kg)
SDA10-4820	48	20	442 (wide) x88 (high) x300 (deep)	About 16.5

Charging parameter:


model	Charging voltage(DCV)		Charging current(A)
	Float voltage(DCV)	Boost voltage(DCV)	
SDA10-4820	53~54 (suggest 53.5)	55~56.4 (suggest 56.4)	≤ 5(limit 5)

Discharging parameter:

model	Discharging voltage(DCV)	Discharging current(A)
SDA10-4820	40~56.4	≤ 20


Using environment:

number	items	qualification	unit	remarks
1	Charging temperature	-20~+65	°C	Suggestion tem : -15 ~+50°C
2	Discharging temperature	-20~+65	°C	

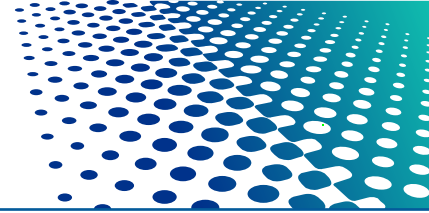

number	items	qualification	unit	remarks
3	Store temperature	-30~+70	°C	≤ +30°C@≤ 6 months ≤ +45°C@≤ 3 months >45°C@ ≤ 1 month
4	relative humidity	5~95	%	No condensation , battery system normally working
5	height	4000	m	if altitude above 2000m, the max working temperature decrease 1°C every 200m.can't higher than 4000m
6	environment	Using in no electric conduction dust and corrode gas place		


SDA 10-4820 LFP lithium communication battery panel instruction:

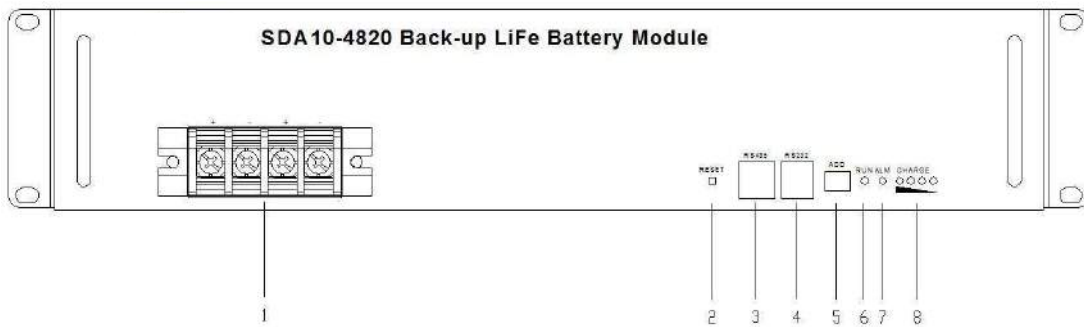


- 1 — power interface
- 3 — Cascading Telecommunication(RS485)
- 5 — Address Dial Number(ADD)
- 7 — Alarm light(ALM)
- 2 — “RESET”and “POWER”key
- 4 — Up-link communication(RS232)
- 6 — Run light, indicate system operation state
- 8 — battery capacity light(SOC)

Performance Curve:


Single cell charge curve@25 °C

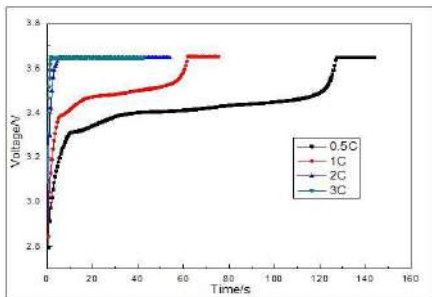

Single cell discharge curve@25 °C

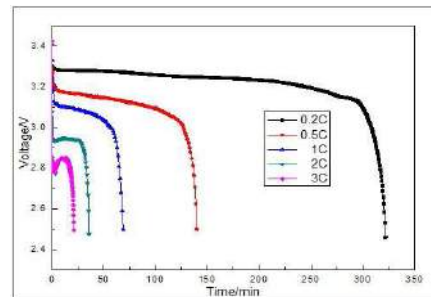

Discharge capacity at different temperature

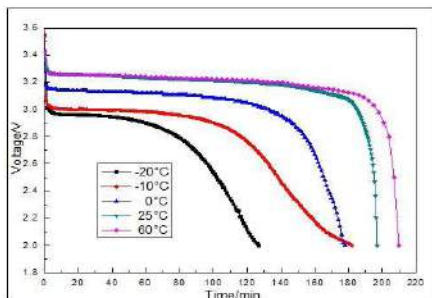

LFP battery discharge cycle at 0.5CA(100%DOD)

